


Features

- 2 Form C(DPD) bifurcated crossbar contacts
- Dip-2c type matching 16 pin Ic socket

PCB Relay

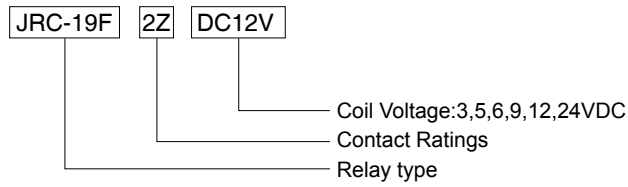

JRC-19F(4078)

Contact Ratings

Contact Ratings	2Z 2A
Contact Resistance	100MΩ (1A 6VDC)
Contact Material	Silver Alloy
Contact Capacity	1A 125VAC 2A 24VDC

Specification

Insulation Resistance	100MΩ .500VDC		
Dielectric Strength	BCC	1000V	1min
	BOC	600V	1min
Operate Time	6ms/4ms		
Terminal Type	PCB		


Coil Ratings

Nominal Coil Power	0.15W,0.2W,0.36W,0.45W
--------------------	------------------------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C ± 10% (Ω)				Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.15W	0.2W	0.36W	0.45W			
3	60	45	25	20	2.25	0.3	3.9
5	167	120	70	56	3.75	0.5	6.5
6	240	180	100	80	4.50	0.6	7.8
9	540	400	220	180	6.75	0.9	11.7
12	960	720	400	320	9.00	1.2	15.6
24	3840	2880	1600	1250	18.00	2.4	31.2

Dimension.Bottom View

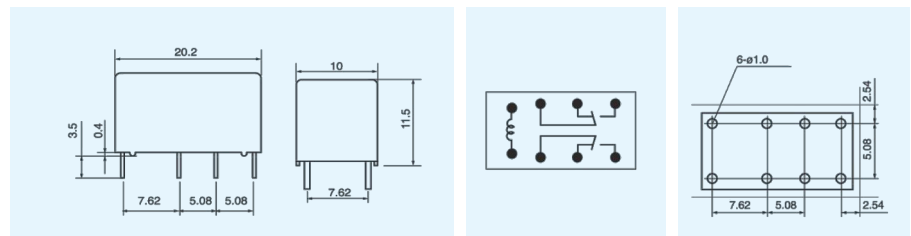

Reference Data

